


NOTES

1. Material: Al-Aly 7050-T7451, 7050-T7651, or 7075-T651
2. Part Marking: Engrave as shown. Replace 'XXXX' with actual PO number.
3. Surface Treatment: None.
4. Cleanliness: Part shall be delivered visibly clean, to the normal unaided eye, of all particulate matter and non-particulate film matter.

REVISIONS

Rev	Change Description	Date	By	Chk
-	Initial Revision	16-Jul-13	AZ	RH
A	Changed from steel to aluminum. Reduced width and added holes. Removed fillets.	9Oct18	RH	RW

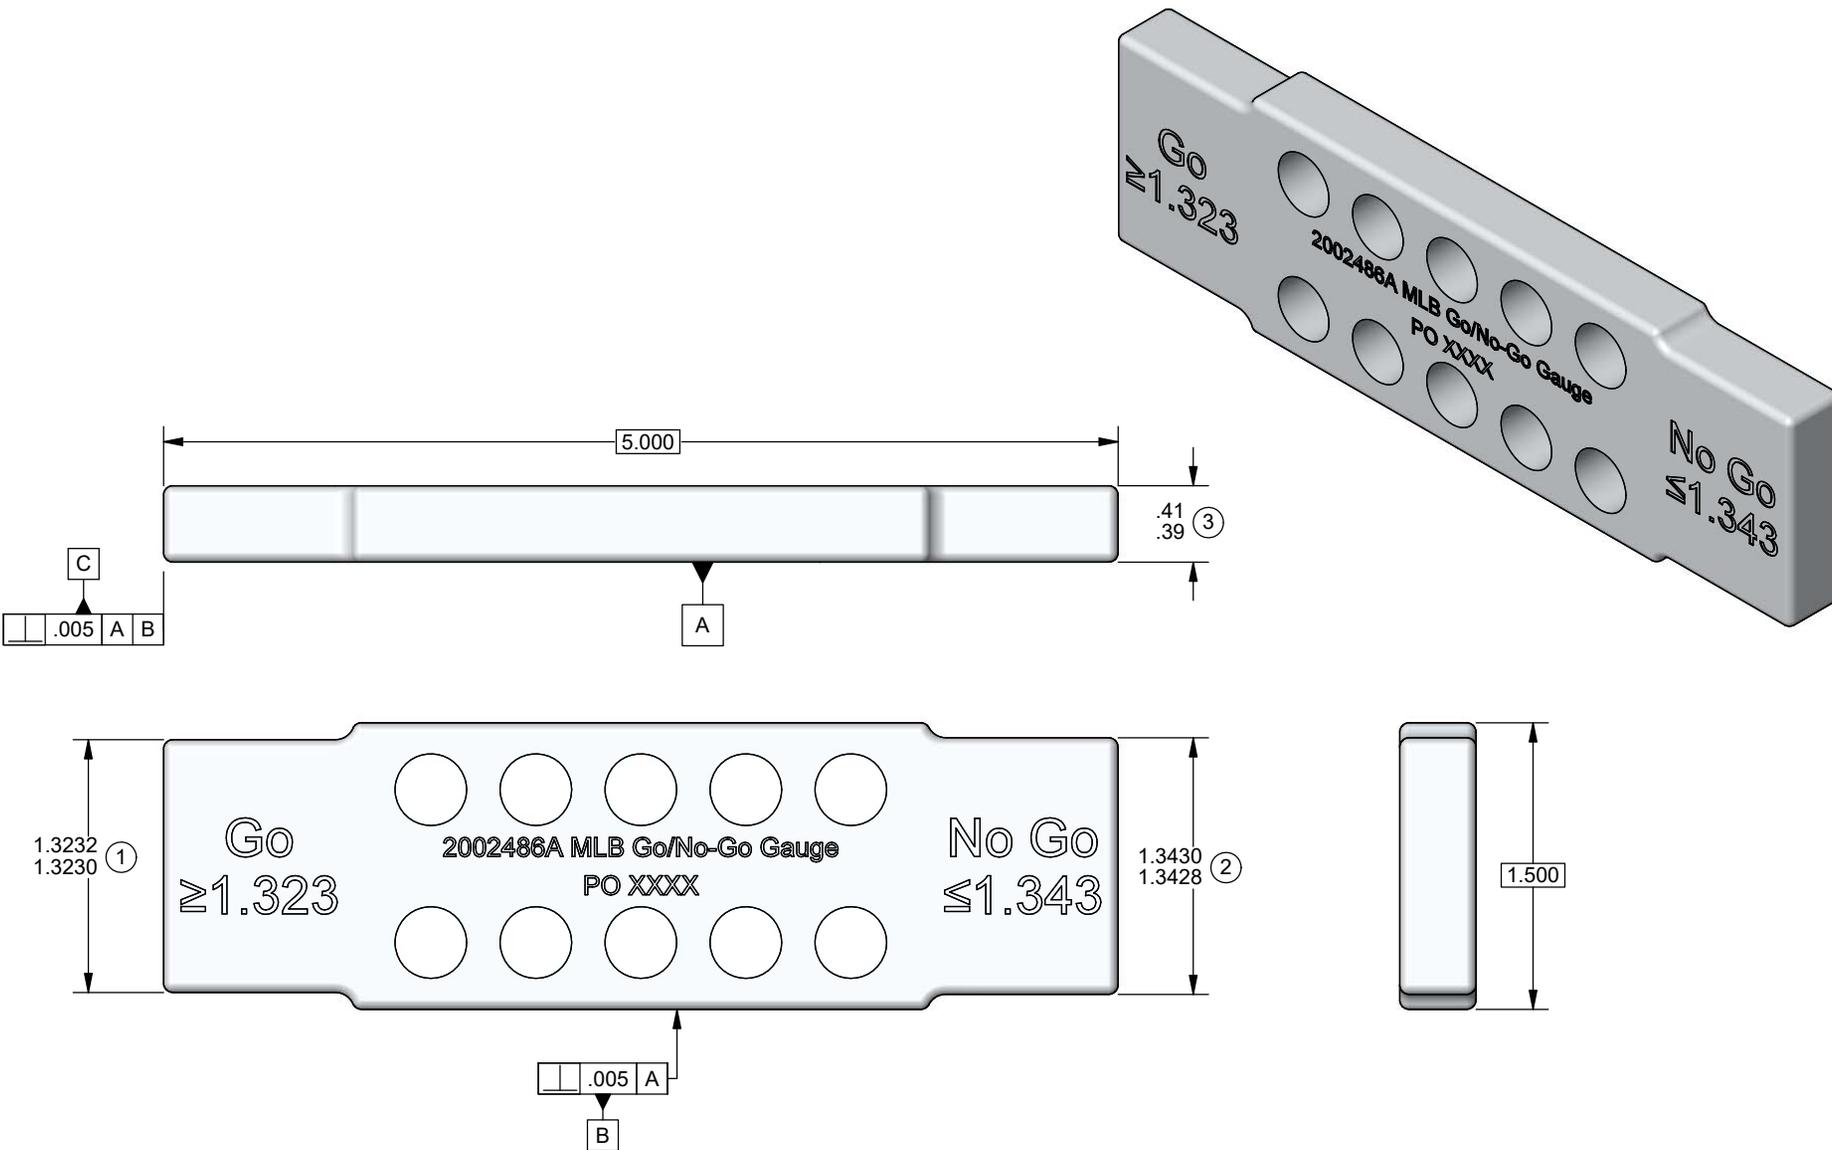

<p>1. All dimensions are in inches 2. Interpret per ASME Y14.5-2009 3. Dimensions apply AFTER all surface treatments 4. Remove all burrs and sharp edges, R.01 max 5. Internal sharp edges may have R.01 max 6. Thread depths are a minimum 7. Inspect all numbered dimensions.</p>		<p>Unless Otherwise Specified Tolerances</p> <table border="0"> <tr> <td>.XXXX ± .001</td> <td></td> <td>A</td> <td>B</td> <td>C</td> </tr> <tr> <td>.XXX ± .005</td> <td></td> <td>A</td> <td>B</td> <td>C</td> </tr> <tr> <td>.XX ± .01</td> <td></td> <td>A</td> <td>B</td> <td>C</td> </tr> <tr> <td>.X ± .03</td> <td></td> <td>A</td> <td>B</td> <td>C</td> </tr> <tr> <td>X ± .2</td> <td></td> <td>A</td> <td>B</td> <td>C</td> </tr> </table> <p>Hole diameters ± .010</p>		.XXXX ± .001		A	B	C	.XXX ± .005		A	B	C	.XX ± .01		A	B	C	.X ± .03		A	B	C	X ± .2		A	B	C	<p>Max surface roughness</p> <p>Material: see Note 1</p> <p>Third Angle Projection</p>	<p>TITLE MLB Go No Go Stow Gauge</p> <p>SIZE A NUMBER 2002486 REV A</p> <p>SCALE 1:1 CAGE CODE: 1PHA7 SHEET 1 OF 1</p>
.XXXX ± .001		A	B	C																										
.XXX ± .005		A	B	C																										
.XX ± .01		A	B	C																										
.X ± .03		A	B	C																										
X ± .2		A	B	C																										